WD4260-DC-00G

WASHER DISINFECTOR WITH DRYING SYSTEM

- washing up to 95 °C - antibacterial thermal disinfection
- user interface with touch colour display, simultaneous display on three independent levels of the operating parameters (program, progress status, temperature/ remaining time/Ao/peristaltic pumps dosage, etc.)
- programs: 20 default + 20 custom + 1 for service
- display front panel in glass with LCD display and USB frontal port for connectivity
- microprocessor electronic control provided with 3 safety levels for parameters editing and adjusting
- provided with software to connect the device and monitoring cycles and parameters
- forced hot air drying system with HEPA air filter
- high efficiency steam condenser Ecoslim, with cold water injection
- peristaltic pump for liquid detergent and level sensor
- peristaltic pump for acid liquid neutralizer and level sensor
- possibility of installing 1 additional peristaltic pump
- washing chamber and internal door in stainless steel AISI 316L
- external panels made of AISI 304 stainless steel
- external dimensions LxDxH: 600 x 600 x 850 mm
- internal working dimensions LxDxH: 525 x 490 x 570 mm
- incorporated water softener with salt sensor
- cold water and demineralized water connections
- ready to hot water connection (to be purchased as option art. T4260AC)
- electronic door lock system for user safety
- electrical connection: 3/N/PE 400 V - 50 Hz - 7 kW max
- default electrical connection: 3/N/PE 400 V - 50 Hz - 7 kW max
- convertible in single phase: 1/N/PE 230 V - 50 Hz - 2,8 kW max
- convertible in tri-phase w/o neutral: 230V 3~ - 50Hz - 19A - 7 kW max
- pass-through hole to insert for validation external temperature probes - max diameter available 9,5 mm (3/8")
- Trolleys CS1-1 and CS2 included

SMEG NORDIC AB Dockplatsen 1 SE-211 19 Malmö | Tel: +46 010 178 34 90 | E-post: professional@smeg.se

ACCESSORIES

B6040L

Stainless steel plinth with lock

D-SM1260EDS

12-Position handpiece washing support with drying system

D-SM8EDS

8-Position handpiece washing support with drying system

CSMICRO1

Micro-instruments basket in fine-drawn mesh with cover, LxDxH: 240 x 235 x 55 mm, mesh 2 x 2 mm



CSKDIN

Basket with handles, LxDxH: 480 x 245 x 50 mm, mesh 5 x 5 mm

D-ST16

Support for 16 trays, occupies 2/3 of CS2 trolley or entire level of D-CS2 trolley, LxDxH: 460 x 310 x 115 mm

TECHNICAL DRAWINGS

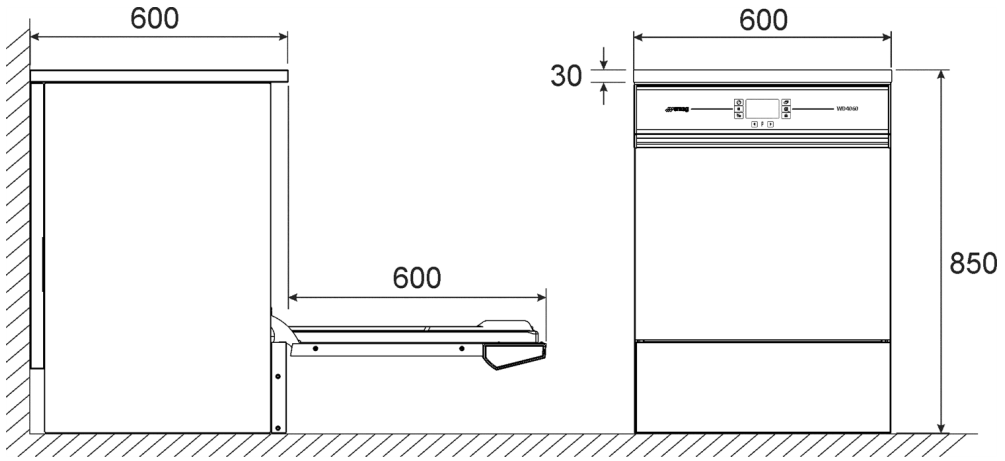

We reserve the right to ev. misprint.
We reserve the right to make design and model changes.

www.smeg-instruments.com

SMEG NORDIC AB Dockplatsen 1 SE-211 19 Malmö | Tel: +46 010 178 34 90 | E-post: professional@smeg.se