NEW:



MELAsonic

Ultra-powerful against the toughest residues



Manual pre-cleaning

Time-consuming and inefficient process for pre-cleaning water-insoluble substances using a plastic brush.



Washer-disinfector

Automated reprocessing is only partially suitable for removing water-insoluble substances such as alginates, dental cements, or lubricating gels.



Ultrasonic cleaner

Highly efficient pre-cleaning of stubborn contamination and water-insoluble substances.



Wave goodbye to stubborn residues:

MELAG
competence in hygiene

Ultrasonic devices ensure ideal preparation for subsequent reprocessing steps while reducing the daily workload of your practice team.



Wave goodbye to stubborn residues:

MELAG
competence in hygiene

Ultrasonic devices ensure ideal preparation for subsequent reprocessing steps while reducing the daily workload of your practice team.

MELAsonic 3



Our 3 L ultrasonic cleaner with dimensions of
28.8 × 24.8 × 15.8 cm (W × H × D)

MELAsonic 6



Our 6 L ultrasonic cleaner with dimensions of
36.5 × 29 × 17.8 cm (W × H × D)



- ✓ 3 or 6 litre capacity, including a matching stainless steel basket
- ✓ Compact device dimensions with a convenient drain tap on the 6 litre model



- ✓ Low-noise device design for comfortable operation
- ✓ Rounded stainless steel tank for easy removal of deposits
- ✓ High quality and powerful components for a long service life



- ✓ Digital time and temperature control
- ✓ Maintenance-free operation for minimal effort by the practice team



Facts and figures at a glance:

	MELAsonic 3	MELAsonic 6
Order no.	ME01303	ME01306
Device dimensions (W × H × D)	28.8 x 24.8 x 15.8 cm	36.5 x 29 cm x 17.8
Stainless steel tank dimensions (W × H × D)	24 x 10 x 13.5 cm 3.2 liters	30 x 15 x 15 cm 6.8 liters
Operating time (adjustable)	1-99 min	
Operating temperature (adjustable)	max. 80 °C	
Drain valve	no	yes
Weight	3.5 kg	5.4 kg
Power supply	220-230 V, 50/60 Hz	
Power consumption	220 W	380 W

Recommendation: 40 °C for effective removal of protein residues






Matching stainless steel basket included with MELAsonic!

Facts and figures at a glance:

	MELAsonic 3	MELAsonic 6
Order no.	ME01303	ME01306
Device dimensions (W × H × D)	28.8 x 24.8 x 15.8 cm	36.5 x 29 cm x 17.8
Stainless steel tank dimensions (W × H × D)	24 x 10 x 13.5 cm 3.2 liters	30 x 15 x 15 cm 6.8 liters
Operating time (adjustable)	1-99 min	
Operating temperature (adjustable)	max. 80 °C	
Drain valve	no	yes
Weight	3.5 kg	5.4 kg
Power supply	220-230 V, 50/60 Hz	
Power consumption	220 W	380 W

Recommendation: 40 °C for effective removal of protein residues

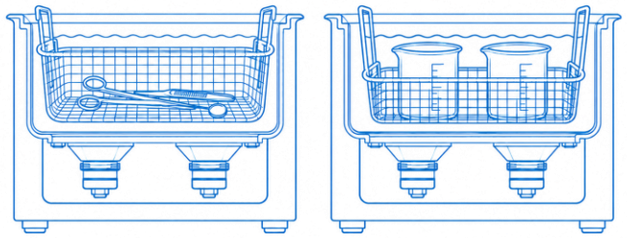

Direct loading method for instruments and indirect method for drills, burs or dentures!

